

RT SERIES

DIESEL POWERED ROUGH TERRAIN SCISSOR LIFT



Performance

Platform Height—Elevated

| | |
|--------|--------|
| RT2669 | 8.0 m |
| RT3369 | 10.0 m |
| RT4069 | 12.3 m |
| RT4769 | 14.3 m |

Platform Capacity

| | |
|------------------------------|--------|
| RT2669 | 680 kg |
| RT3369 | 454 kg |
| RT4069 | 363 kg |
| RT4769 | 363 kg |
| — Capacity on Deck Extension | 136 kg |

No. Occupants (Indoor/Outdoor)

| | |
|--------|-----|
| RT2669 | 4/4 |
| RT3369 | 4/2 |
| RT4069 | 3/2 |
| RT4769 | 3/2 |

Lift/Lower Time

| | |
|--------|---------------|
| RT2669 | 36/28 seconds |
| RT3369 | 42/33 seconds |
| RT4069 | 69/46 seconds |
| RT4769 | 81/55 seconds |

Maximum Drive Height

Full Height

Weight *

| | |
|--------|----------|
| RT2669 | 3,900 kg |
| RT3369 | 4,350 kg |
| RT4069 | 5,015 kg |
| RT4769 | 6,420 kg |

Drive Speed—Lowered

5.6 km/h

Drive Speed—Elevated

0.8 km/h

Gradeability

| | |
|--------|-----|
| RT2669 | 40% |
| RT3369 | 40% |
| RT4069 | 35% |
| RT4769 | 30% |

Turning Radius (Inside)

2 m

Turning Radius (Outside)

4 m

* Certain options or country standards will increase weight

Standard Specifications

Tyres

- Tyre size (non-marking) 26 x 12 Foam Filled

Engine

- Diesel Engine Kubota D1305-E4B-J 24.8 hp (18.5 kw)
- Fuel Tank Capacity 38 L
- Drive 4WD Hydrostatic

Hydraulic System

- Hydraulic Reservoir 50 L



Standard Features

- Hydraulic Leveling Jacks (Auto Level)
- Roll-out Deck Extension
- 4WD
- Moveable, Removable Platform Console Box
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-closing Self-locking Gate
- Flashing Amber Beacon - LED
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent
- Oscillating Front Axle
- Scissor Maintenance Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Non-Marking Tyres
- 240V-AC Receptacle In Platform incl. ELCB
- 23 Amp Automatic, SCR Battery Charger
- All Motion Alarm
- Descent Alarm
- Horn
- Hourmeter
- Proportional Lift and Drive
- LCD Display with LiftSense System
- Pin-based Load Sensing System
- Telematics-Ready Harness
- AS/NZS 1418.10 Compliant

Accessories & Options

- White Noise Backup Alarm
- JLG CleanGuard
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Operator Access Control
- Heavy Duty Pipe Racks


RT SERIES

DIESEL POWERED ROUGH TERRAIN SCISSOR LIFT



Dimensions

All dimensions are approximate.

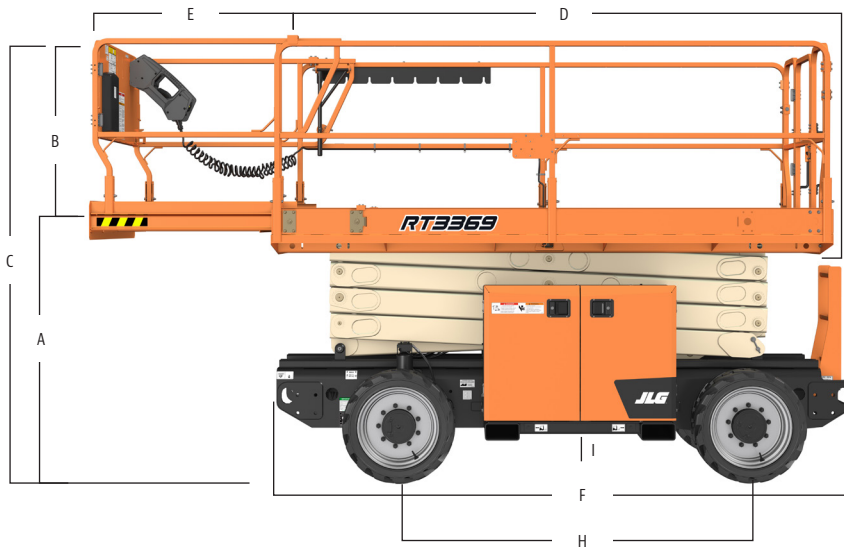

A. Platform Height – Lowered

| | |
|--------|--------|
| RT2669 | 1.30 m |
| RT3369 | 1.46 m |
| RT4069 | 1.46 m |
| RT4769 | 1.62 m |

B. Platform Railing Height*

1.14 m

C. Overall Height

| | |
|---------------|--------|
| RT2669 | |
| -Rails Up | 2.46 m |
| -Rails Folded | 1.89 m |
| RT3369 | |
| -Rails Up | 2.61 m |
| -Rails Folded | 2.05 m |
| RT4069 | |
| -Rails Up | 2.62 m |
| -Rails Folded | 2.05 m |
| RT4769 | |
| -Rails Up | 2.77 m |
| -Rails Folded | 2.21 m |

D. Platform Dimensions

3.3 x 1.6 m

E. Platform Extension

1.07 m

F. Overall Machine Length

3.53 m

G. Overall Machine Width

1.76 m

H. Wheelbase

2.07 m

I. Ground Clearance

25.7 cm

The JLG "1 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds AS/NZS 1418.10 2011 as originally manufactured for intended applications.

R112420



JLG Industries (Australia)

358 Park Road
Regents Park, NSW 2143
Telephone 02 8718 6300
Fax 02 8718 6377
www.jlg.com.au

An Oshkosh Corporation Company