

ES1530L

LIGHTWEIGHT ELECTRIC SCISSOR LIFT

SCISSOR LIFT



Performance*

Platform Height (Indoor Only)	4.50 m
Platform Capacity (Indoor Only)	227 kg
Number of Occupants	1 x person
Capacity on Platform Extension	115 kg
Lift/Lower Time	25/15 Seconds
Maximum Drive Height (Indoor Only)	Full Height
Weight*	880 kg
Drive Speed–Elevated	0.8 km/h
Drive Speed–Lowered	3.8 km/h
Gradeability	25%
Turning Radius (Inside)	Zero
Turning Radius (Outside)	1.4 m

* Certain options or country standards will increase weight.

Standard Specifications*

Power Source

Batteries	2 x 12V 130 amp-hr
Charger	27 amp
Drive	24V Electric Front Wheel

Hydraulic Reservoir

• Capacity	5 L
• Pump	Fixed Displacement Gear

Tyres

• Tyre Size/Type (Non-Marking)	255 x 75 mm
--------------------------------	-------------

Brakes

• Electric / Friction

Standard Features*

• Proportional Controls	• Fork Lift Pockets
• Battery Condition Indicator	• Foot-Actuated Deck Extension
• All Motion Alarm	• Steel Swing-Out Doors
• 27 amp Multi-Function Universal Charger	• Variable Tilt Window
• Horn	• Manual Descent Cable
• Hourmeter	• Diamond Tread Steel Deck
• Tilt Alarm and Light	• Greaseless Kingpin Joints
• Lanyard Attach Points	• Analyzer Port for Diagnostics
• Moveable, Removable Platform Control	• Dynamic Braking
• Nickel Plated Pins	• Flashing Amber Beacon
• Lubrication Free Scissor Arm Bushings	• Self Closing, Self Latching Gate
• Scissor Maintenance Prop	• MDI (Ground)
• Active Pothole Protection System	• Drive Motor Covers
• Lifting and Tie Down Points	• AS/NZS 1418.10 Compliance

Accessories & Options

• 220 Amp-Hour AGM Batteries	• Access Control
• Fire Extinguisher	• Mobile Control
• Anti-Vandalism Package for Ground Controls and Platform Controls	
• Ambient Noise (Squaker) Alarm	
• AC Outlet To Platform incl. ELCB	
• ClearSky	



ES1530L


LIGHTWEIGHT ELECTRIC SCISSOR LIFT

SCISSOR LIFT



Dimensions

A. Platform Height-Lowered	0.79 m
B. Platform Railing Height	1.10 m
C. Overall Height	1.90 m
D. Platform Size	0.62 m x 1.25 m
E. Platform Extension	0.55 m
F. Overall Width	0.76 m
G. Overall Length	1.43 m
H. Wheelbase	1.08 m
I. Ground Clearance	0.06 m

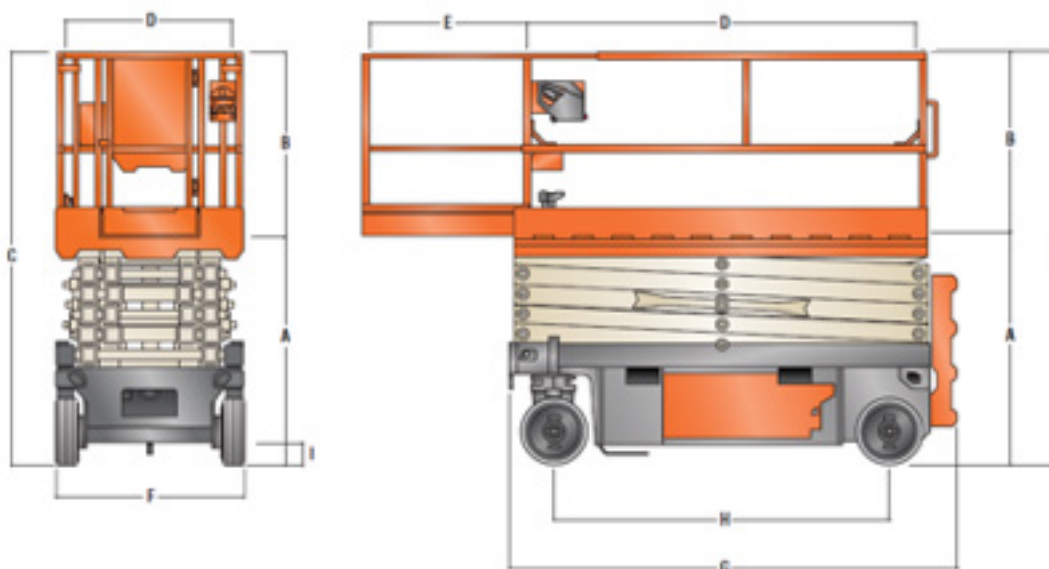

The JLG "2 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "2 & 5" Warranty. We provide coverage on all products for one (2) full year and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds AS/NZS 1418.10 2011 as originally manufactured for intended applications.

Part No.: AU
R070219-2



JLG Industries (Australia)

358 Park Road
Regents Park, NSW 2143
Telephone 02 8718 6300
Fax 02 8718 6377
www.jlg.com.au

An Oshkosh Corporation Company