

Model TOUCAN® SERIES

MAST BOOM LIFTS



Performance

Platform Height		
T20E	20 ft 2 in.	6.14 m
T26E	26 ft 5 in.	8.05 m
E33MJ	32 ft 9 in.	9.98 m
Horizontal Outreach		
T20E	6 ft 6.9 in.	1.99 m
T26E	8 ft 8 in.	2.64 m
E33MJ	14 ft 6 in.	4.42 m
Up and Over Height		
T20E	16 ft 8.75 in.	5.1 m
T26E	21 ft 8 in.	6.64 m
E33MJ	23 ft 6 in.	7.16 m
Swing	360 Degrees Non-continuous	
Platform Capacity	500 lb	227 kg
Platform Size		
T20E	33 x 34.5 in.	84 x 88 cm
T26E	29 x 33 in.	73 x 84 cm
E33MJ	27.5 x 43.3 in.	70 x 110 cm
Weight		
T20E	5,360 lb	2,431 kg
T26E	6,834 lb	3,100 kg
E33MJ	11,574 lb	5,250 kg
Ground Bearing Pressure		
T20E	209 psi	14.7 kg/cm ²
T26E	256 psi	18.0 kg/cm ²
E33MJ	287 psi	20.0 kg/cm ²
Ground Clearance	3 in.	8 cm
Drive Speed Stowed		
T20E	3.4 mph	5.5 km/hr
T26E	3.4 mph	5.5 km/hr
E33MJ	2.2 mph	3.6 km/hr
Drive Speed Elevated	0.43 mph	0.7 km/hr
Gradeability		
T20E	25%	
T26E	25%	
E33MJ	20%	
Turning Radius (Inside)		
T20E	0 in.	0 m
T26E	1 ft 10 in.	0.55 m
E33MJ	60 in.	1.53 m
Turning Radius (Outside)		
T20E	5 ft 9 in.	1.75 m
T26E	6 ft 7 in.	2.10 m
E33MJ	10 ft 6 in.	3.20 m

Standard Specifications

Battery

• T20E	24V, 225 amp-hr
• T26E	24V, 240 amp-hr
• E33MJ	24V, 930 amp-hr

Battery Charger – Output

• T20E	25 amps
• T26E	25 amps
• E33MJ	55 amps



Brakes

- Spring Applied

Tires

• T20E	16 x 5 x 10.5 Non-marking
• T26E	125 x 408 Non-marking
• E33MJ	18 x 7 x 12.12 Non-marking

Standard Features

- 110V-AC Receptacle in the Platform
- Battery Condition Indicator
- 360 Degree Non-continuous Swing
- All Motion Alarm
- Emergency Lowering Pump
- Hourmeter
- Proportional Controls
- Lifting Eyes
- 5 Degree Tilt Alarm/Indicator Light
- Tie-down Lugs
- Dual Warning Beacons
- Horn

Accessories & Options

- ½ in. Airline to Platform*
- Platform Work Lights*

* Airline and Platform Work Lights are not available in combination.


Model TOUCAN[®] SERIES

MAST BOOM LIFTS


Dimensions

All dimensions are approximate.


T20E



T26E

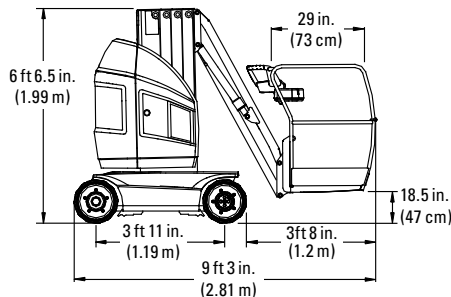


E33MJ

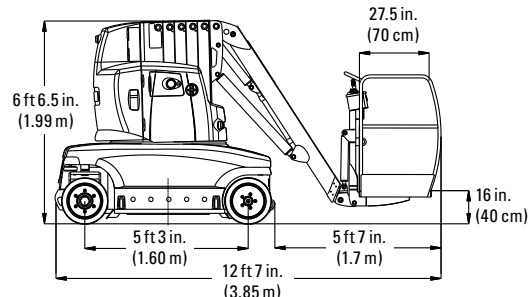


Reach Dimensions


T20E

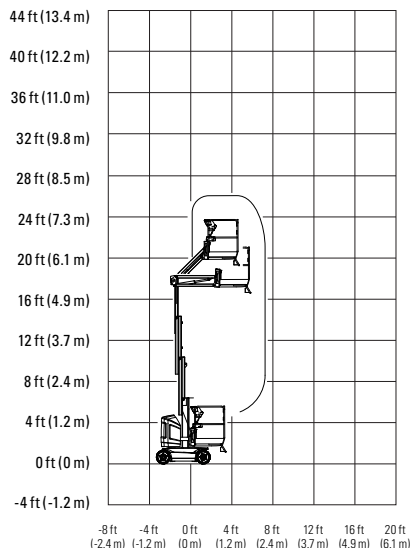

T26E

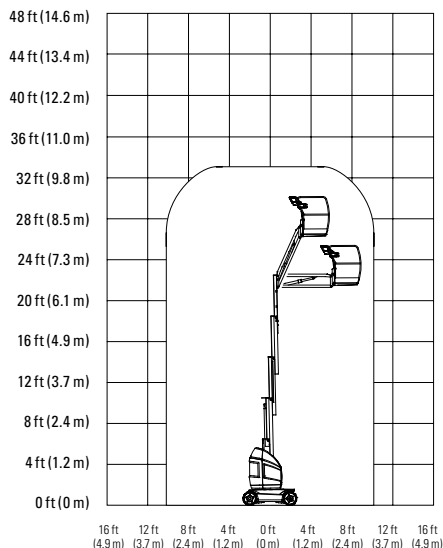

E33MJ

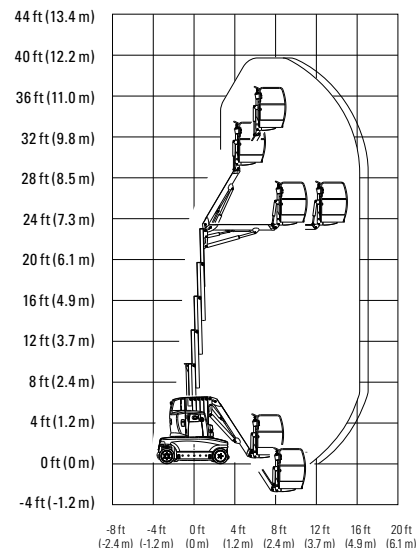

The JLG "1 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453, ANSI A92.6-2006, and CSA Standard CAN3-B354.2-M82, as originally manufactured for intended applications.

Form No.: SS-MB-0406
Part No.: 3132127
R011304
Printed in USA



JLG Industries, Inc.

1 JLG Drive
McConnellsburg, PA 17233-9533
Telephone 717-485-5161
Toll-free in US 877-JLG-LIFT
Fax 717-485-6417
www.jlg.com

An Oshkosh Corporation Company