

1230P

PUSH-AROUND MAST LIFT

LOW-LEVEL ACCESS



KEY SPECS

Platform Height

11-ft 4-in / 3.50-m

Working Height

17-ft 4-in / 5.50-m

Platform Capacity

440-lb / 200-kg

KEY FEATURES

- Get to work faster with the push-around design and powered lifting.
- Lightweight, maneuverable design easily fits through most doorways and freight elevators.
- Safer, more ergonomic alternative to ladders - work comfortably with both hands and 360-degree range of motion.

STANDARD SPECIFICATIONS

Performance

Platform Height	11-ft 4-in / 3.50-m
Working Height	17-ft 4-in / 5.50-m
Overall Height	6-ft 5-in / 1.95-m
Platform Entry Height	15-in / 39-cm
Platform Size (L X W)	33.5-in x 28-in / .85-m x .72-m
Machine Length	47-in / 1.19-m
Machine Width	30-in / 0.76-m
Weight	952-lb / 432-kg
Platform Capacity	440-lb / 200-kg
Maximum Gradient for Operation	0.5 Degrees
Maximum Gradient for Pushing	5 Degrees
Max Ground Bearing Pressure - Front	173.33 psi
Max Ground Bearing Pressure - Rear	488.76 psi
Max Wind Speed Rating	0 mph / 0 m/s - Indoor Use Only

Power Source

Batteries	12V AGM
Battery Charger	Automatic 110V, 12V DC, 6A

STANDARD FEATURES

- Self-Closing Saloon Style Entry Gate
- Frame-Mounted Bubble Level
- Integrated Fork Pockets
- Protective Wall Bumpers
- Tool Tray
- Service Prop
- Static Strap
- Emergency Descent
- Non-Marking Wheels
- Auto-Locking Wheels on Elevation
- Battery Charge Indicator
- Hour Meter


ACCESSORIES & OPTIONS

- Maintenance Tray with Anchor Points to Tether Tools

1230P

PUSH-AROUND MAST LIFT

LOW-LEVEL ACCESS

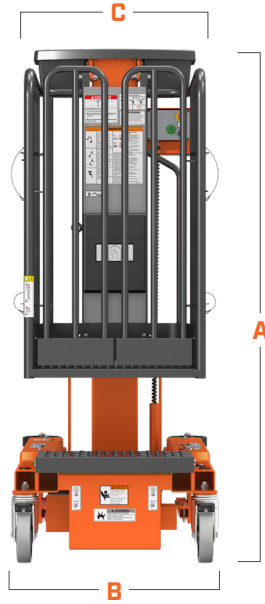

- | | |
|----------------------------|--------------------|
| A. Machine Height (stowed) | 6-ft 5-in / 1.95-m |
| B. Machine Width | 30-in / 0.76-m |
| C. Platform Width | 28-in / .72-m |
| D. Machine Length | 47-in / 1.19-m |
| E. Platform Length | 33.5-in / .85-m |
| F. Rail Height | 43.8-in / 1.11-m |



We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.



JLG INDUSTRIES, INC.
Toll-free US 877-JLG-LIFT
JLG.com

An Oshkosh Corporation Business