

T12E

TOUCAN® SERIES

MAST-STYLE BOOM LIFT



KEY SPECS

Platform Height
32-ft 3-in / 9.83-m

Horizontal Outreach
14-ft-11-in / 4.55-m

Up and Over Height
22-ft-9.5-in / 6.95-m

Platform Capacity
500-lb / 227-kg

KEY FEATURES

- Reach up and over obstacles in tight spaces with a vertical telescopic mast with a jib.
- Unmatched positioning capabilities with a 345 degree rotating mast.
- Equipped for indoor jobs with standard non-marking tires and efficient electric power, and for outdoor work with 25% gradeability.
- Optimum battery life and more duty cycles with AC direct electric drive.

STANDARD SPECIFICATIONS

Performance

Platform Height	32-ft 3-in / 9.83-m
Horizontal Outreach	14-ft-11-in / 4.55-m
Up and Over Height	22-ft-9.5-in / 6.95-m
Swing	345 Degrees Non-continuous
Platform Capacity	200 kgs
Platform Size	27.5 x 41.3-in / 70 x 105-cm
Weight*	4,300 kgs
Ground Bearing Pressure	12.5 kg/cm ²
Ground Clearance	3.9-in / 10-cm
Drive Speed (Stowed)	3.4 mph / 5.5 km/h
Drive Speed (Elevated)	0.47 mph / 0.76 km/h
Gradeability	25%
Turning Radius (Inside)	2-ft-6-in / 76-cm
Turning Radius (Outside)	8-ft-6-in / 2.59-m

*Certain options or country standards increase weight

Power Source

Batteries	48V DC, 260 amp-hr
Charger	20 amps

Brakes

Spring Applied Disc

Tires

18-in x 7-in Non-Marking

STANDARD FEATURES


- 110V-AC Receptacle in the Platform
- 345 Degree Non-continuous Swing
- 5 Degree Tilt Alarm/Indicator Light
- All Motion Alarm
- Battery Condition Indicator
- ClearSky Smart Fleet™ Hardware (CS550)
- Emergency Lowering Pump
- Horn
- Hourmeter
- LED Motion/Amber Beacon (CS550)
- Lifting Eyes
- Load Sensing System
- Proportional Controls
- Platform, Saloon Gate
- SkyGuard SkyLine™
- Tie-down Lugs
- Warning Beacon

ACCESSORIES & OPTIONS

- 1/2-in Airline
- 70W Platform Work Light
- Batteries, 48V AGM
- Platform, Drop Bar


DIMENSIONS

All dimensions are approximate

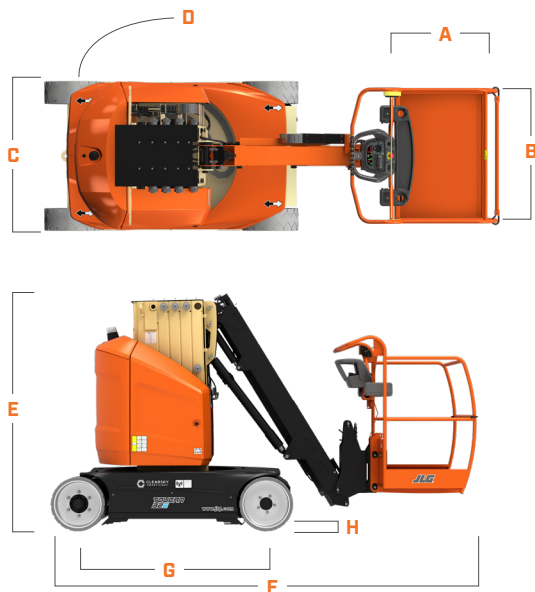

A. Platform Width	27.5-in / 0.70-m
B. Platform Length	41.3-in / 1.05-m
C. Machine Width	3-ft-11.25-in / 1.20-m
D. Tailswing	5.9-in / 15-cm
E. Machine Height	6-ft-6-in / 1.98-m
F. Machine Length	12-ft / 3.65-m (Drop Bar)
G. Wheelbase	5-ft 3-in / 1.60-m
H. Ground Clearance	3.9-in / 10-cm

REACH DIAGRAM

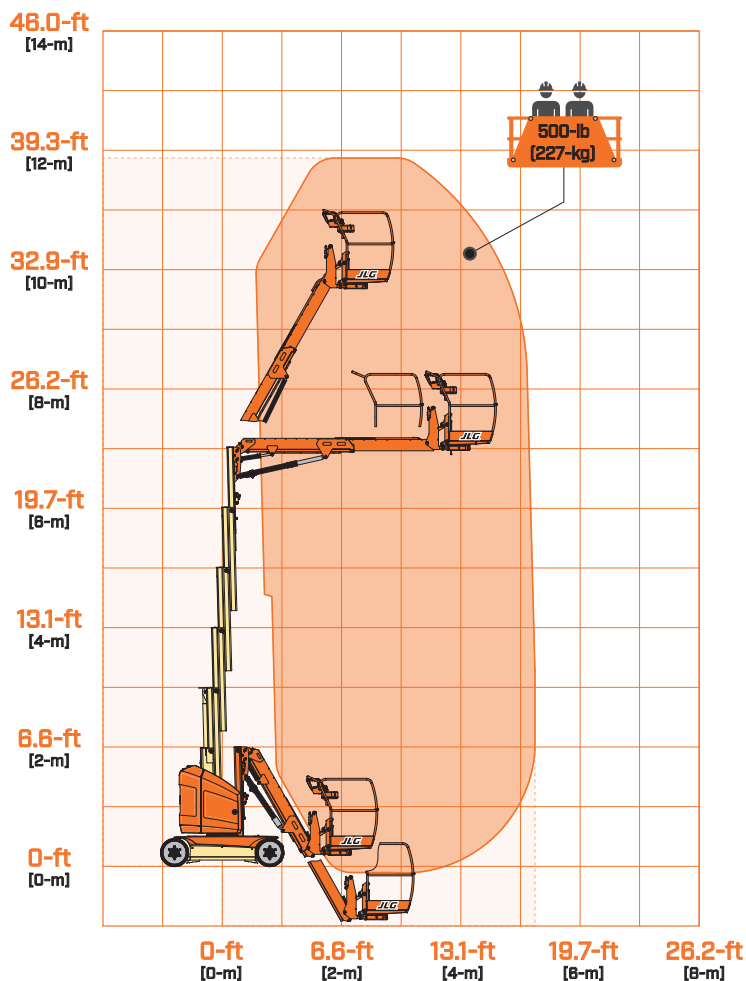

We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.



Oshkosh-JLG [S] Technology Equipment Pte Ltd
 32 Jalan Kilang Barat
 Kewalram House, 159364
 Singapore
 Phone: +65 6591 9368