

JLG® ELECTRIC POWERED

Mobile Elevating Work Platforms



JLG

JLG® MOBILE ELEVATING WORK PLATFORMS

Today, more people are demanding environmentally friendly equipment. More municipalities are demanding "green" building for new construction and renovations. The JLG® line of electric powered mobile elevating work platforms are the green machines in the lift industry.

JLG® electric powered mobile elevating work platforms feature longer runtime, greater uptime and higher productivity. The energy-efficient electric drive boosts your productivity with industry-leading duty cycles.

These machines are specifically designed so you have fewer scheduled services, a quieter work area, less dependency on hydraulic oils and zero emissions. From job start to completion, whether you need a scissor lift, boom lift or mast lift, JLG has an electric lift to meet your needs and keep your job green.

"With JLG® machines, I can get the job done faster and with less impact on the environment."





READY TO WORK OVERTIME

Experience the benefits of reduced charging time and longer runtime with ES Series scissor lifts. You can stay on the job longer, getting more work done in one day. And the optional application-specific accessory packages enhance productivity.

With only two hoses and four fittings, you're working with a cleaner machine that decreases scheduled service requirements and reduces the chance for leaks.

Up to 1,000 lb capacity, proportional controls for ease of operation and optional accessory packages give you exactly what you need to get the job done.

"I'm always impressed with how much runtime we get before recharging."

THE RIGHT CAPACITY FOR THE JOB

The ES Series features various restricted and unrestricted capacities based on indoor or outdoor application. The 2632ES is rated to carry 800 lb up to 20 ft indoors, while its unrestricted capacity outdoors is up to 500 lb. The 2646ES features a 1,000-lb unrestricted capacity indoors and a 500-lb unrestricted capacity outdoors. And, the 3246ES is restricted to 26 ft at 1,000 lb indoors, while unrestricted up to 700 lb in both indoor and outdoor applications.

NARROW OR WIDE PLATFORMS

The 2632ES features a 32-in. wide narrow platform for access through standard doorways. The 2646ES and 3246ES provide a 46-in. platform for more worker tools or supplies.

VERSATILE ENOUGH FOR ANY WORKSITE

From commercial construction to hospitals, schools and facilities maintenance applications, the R Series can be used virtually anywhere there's work to be done. The ruggedness of thick rubber tires and all-steel component doors and platforms make them extremely reliable. R Series scissor lifts deliver the value you need without sacrificing performance and quality.

With platform capacities up to 770 lb, operators can reduce the number of trips to the ground for additional tools and materials. An optional MDI display and improved battery charger enhance uptime by assisting with trouble-shooting.

LOW COST OF OWNERSHIP

With a simplified pothole protection system that minimizes the number of moving parts and the associated repair costs, the R Series is a valuable solution for everyday job site needs.

IMPROVED SERVICEABILITY

With no stacked components, the R Series makes it easy for service personnel tackle the task at hand without having to remove other components.



ES SERIES



Longer Runtime

On a single charge, the electric drive delivers more than double the battery life of hydraulic drive machines.



One-Handed Operation

Fully proportional drive and lift control is smoother and more efficient.

R SERIES



Active Pothole Protection

Active pothole protection provides increased ground clearance.



Greater Serviceability

Improved battery charger and all-steel swing-out component tray and for greater serviceability.



OUTSTANDING PERFORMANCE, ON SLAB AND OFF

Handle a wide variety of terrain indoors and out, without noise and fumes thanks to the quiet operation and zero emissions of the 4069LE. With the standard oscillating axle, 35% gradeability, rugged all-terrain tires and available all-wheel drive, you'll be able to go off the slab and into the mud with the 4069LE scissor lift.

There are two models available with working heights up to 46 ft and a maximum platform capacity of 1,000 lb. All models will fit through standard double doorways to get you to and from the work site.

The efficient direct electric drive system gives you the muscle you'll need for demanding jobs; and, you'll get double the duty cycles of other electric scissors with the deep cycle batteries. Plus, the M model has the multipower feature, which has an on-board, diesel-powered generator with improved fuel efficiency for lower costs.



COMPACT. POWERFUL. PRODUCTIVE.

The ultra-compact 1230ES mast lift is compact enough to fit in a freight elevator and lightweight enough to be used on weight-sensitive floors. Its 5-inch turning radius navigates tight workspaces while heavy-duty steel wheels with non-marking rubber provide a more cushioned ride.

Charged and ready to go, the super-efficient electric drive increases your uptime and gives your productivity a lift. With 500 lb capacity, the 1230ES has the muscle to carry you and your gear, even at full height.

No chains, cables or rollers to grease or adjust in the mast means you've got lower maintenance requirements and operating costs. Plus, the 1230ES helps to keep your work environment clean; with only four hoses, you greatly reduce the chance for hydraulics leaks.


SALOON GATE

Saloon-style swing gate for ease of entry and exit.



98% CLEANER

Fewer hoses and couplings mean fewer potential leak points.

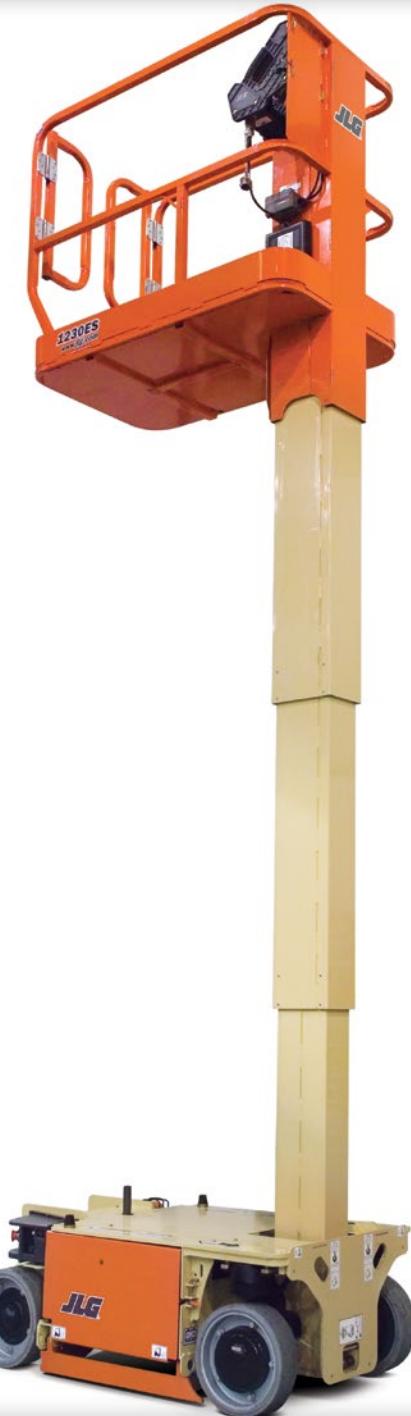

LE SERIES



Off-Slab Mobility

Full-time automatic traction control and an oscillating axle boost off-slab productivity.



Platform Extension

A standard feature, the platform extension has a 250 lb capacity.

1230ES SERIES



Tool Tray

The workstation includes tool and fastener tray, 110V AC outlet and one-hand controller operation.



Serviceability

All-steel swing-out battery doors have heavy-duty hinges. Rugged design and strong 12 ft mast provide durability.



PUTS HARD TO REACH WITHIN REACH

With the JLG Toucan® vertical mast lift, you can meet your overhead challenges head on. Work up, over and around assembly lines, shelving, ductwork or partitions more easily and without interferences. Positioning is easier with a 345° rotating mast, up to 32 ft of lift height and 15 ft of jib reach. With its 500-lb capacity and a long-running, environmentally friendly electric powered drive, the Toucan will help you boost productivity hour by hour, year after year.

BUILT TO TAKE ON YOUR FACILITY CHALLENGES

Plant maintenance, retooling and changeovers, warehousing, inspection and remodeling, general contracting—you can count on the Toucan Series to help keep production moving.

AS VERSATILE AS YOUR NEEDS

With thick rubber non-marking tires, clean and efficient electric power and 25% gradeability, you're equipped better than ever to meet your access challenges.

Smooth proportional controls, a narrow chassis and greater horizontal outreach are just some of the features that come standard and help you get the job done with greater speed and efficiency.

EXPERIENCE ROUND-THE-CLOCK PERFORMANCE

Stay on the job longer than the competition thanks to the industry-leading duty cycles of JLG® E Series boom lifts. These environmentally friendly machines deliver maximum performance, including automatic traction control, which allows both drive wheels to work independently for improved traction on uneven surfaces.

E Series booms are available in a range of platform heights and chassis widths—all with enhanced platform capacity—to help you find the perfect machine to suit your work environment. Plus, the exclusive JibPLUS® articulating boom option has a 180° range of side-to-side movement, providing you with even greater access to hard-to-reach places.



TOUCAN® SERIES



Work Cleaner

Thick rubber non-marking tires leave facility floors intact.



Greater Access

Compact dimensions for getting into hard-to-reach areas.

ELECTRIC SERIES



JibPLUS® Boom Option

Gain greater reach with 180-degree range of side-to-side movement.



Narrow Width

Accomplish more with greater maneuverability in tight spaces.



DIESEL-LIKE PERFORMANCE. HYBRID VERSATILITY.

The H340AJ and H800AJ models are 4WD boom lifts that combine diesel-like performance with the benefits of hybrid efficiency, so you can tackle jobs inside and out. By reducing fuel consumption and lowering maintenance costs, these hybrids offer a lower total cost of ownership.

SAME POWER AND PERFORMANCE

New hybrid models have similar components to their diesel counterparts, so you get uncompromising performance with the benefits of hybrid technology.



INDOOR AND OUTDOOR USE

Less noise and lower emissions give access to job sites where traditional diesel machines are not allowed to operate. For enclosed facilities, that means a less disruptive, more productive working environment.

ENHANCED FUEL EFFICIENCY

Using up to 40% less fuel*, these versatile boom lifts combine electrical and mechanical power to tackle rough terrain and navigate inclines.



Reduced Maintenance

With maintenance-free AGM batteries and a smaller Tier 4 Final engine, maintenance and service requirements are reduced.



Low Emissions

Experience reduced fuel use*, emissions, noise and maintenance.

CLEAN AND GREEN, 60-FT MACHINE

The EC600 Series gives you the most height in an electric powered boom lift and over 44 ft of horizontal outreach. With four configurations, you can choose from electric or multi-power, standard jib or horizontally pivoting jib with JibPLUS®.

A 17,210 (7,807 kg) low gross vehicle weight and non-marking all-terrain tires let you work on slab or off without hesitation. With the Automatic Traction Control, optional all-wheel drive and standard oscillating axle, you won't need to be shy about traveling over rough terrain.



Whether your jobs include industrial applications, maintenance, construction or anything in between, the EC600 Series delivers with zero emissions and reduced noise levels.



H340AJ & H800AJ

EC600 SERIES




Optional All-Wheel Drive

Power through difficult terrain on the job site.



Environmentally-Friendly

Electric power system makes it possible to deliver zero emissions.

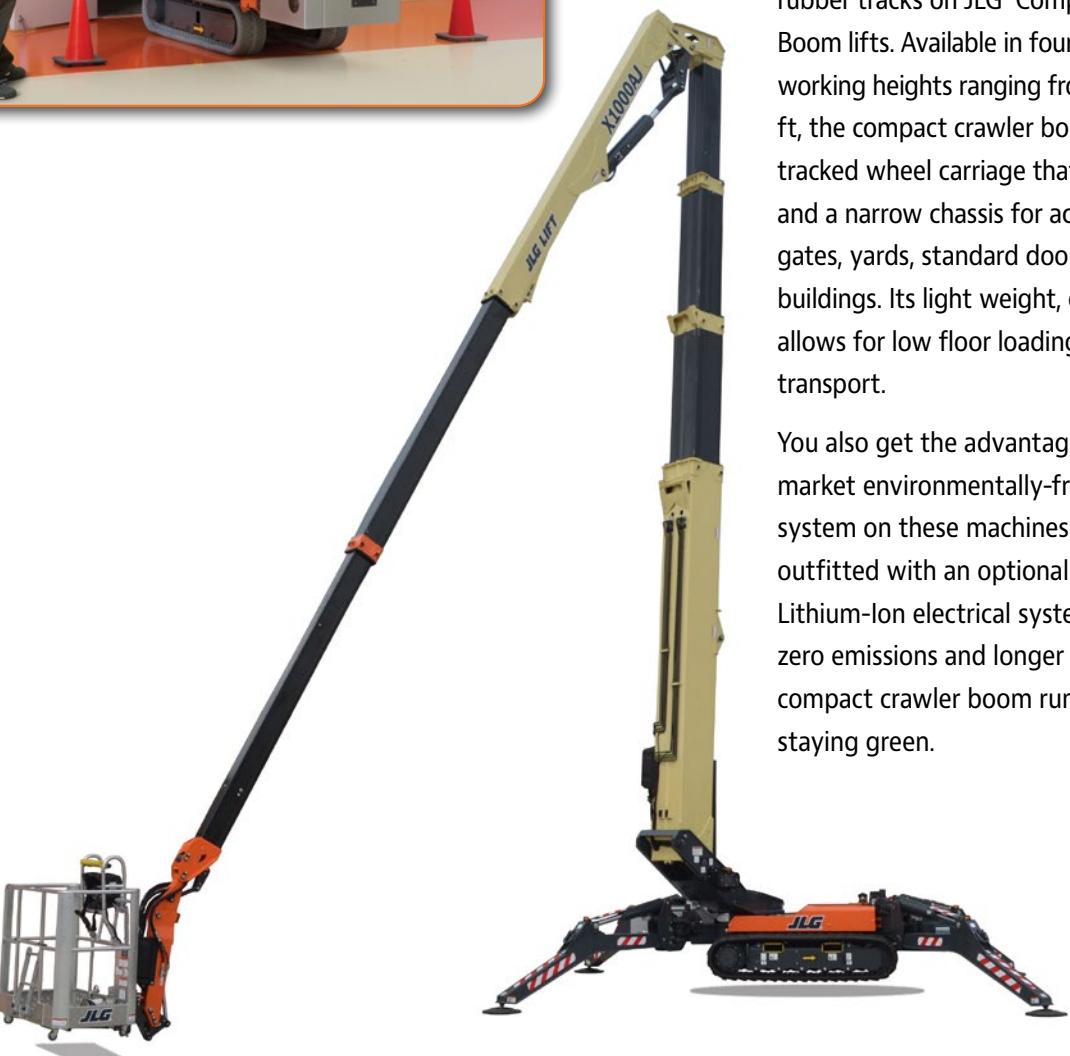

REACH WHAT OTHERS CAN'T

Now you can go more places around the job site thanks to the low weight and rubber tracks on JLG® Compact Crawler Boom lifts. Available in four models with working heights ranging from 50 ft to 106 ft, the compact crawler booms feature a tracked wheel carriage that climbs steps and a narrow chassis for access through gates, yards, standard doorways and public buildings. Its light weight, compact design allows for low floor loading and ease of transport.

You also get the advantage of a first-to-market environmentally-friendly power system on these machines—they are outfitted with an optional breakthrough Lithium-Ion electrical system that produces zero emissions and longer runtime, so the compact crawler boom runs clean while staying green.

TOW-PRO® GOES WHEREVER YOU GO

The Tow-Pro® Series lets you tackle the same jobs as the other JLG® electric boom lifts, but with an easier option for transportation. You also have the choice of a 24V DC electric or gas-powered engine. And with the standard combination hitch, industry-leading 65 mph towing speed and hydraulic auto-leveling outriggers, you can have the Tow-Pro to the job site and working in no time.

Standard air and water lines to the platform let you tackle a variety of jobs, including residential maintenance, construction, pressure washing, tree trimming, exterior painting and maintenance tasks, with greater ease. Two models offer platform heights of 35 ft or 50 ft, and both have a 500 lb capacity for you and your tools.



EASY ACCESS

The articulating jib on the T500J gets you into those hard-to-reach places.



OPTIONAL GENERATOR

An accessory mounting tray accommodates a generator, air compressor or pressure washer.

COMPACT CRAWLER SERIES



Enhanced Control Panel

Operator-friendly controls have one-touch outrigger leveling and interactive display in platform.



Ease of Transport

Fits on a trailer or tilt-back truck (low weight, good gradeability, compact).

TOW-PRO SERIES



Innovative Controls

Detachable platform controls provide faster and more efficient boom positioning with one-hand operation of all boom functions.



Ease of Transport

A standard combination hitch and adjustable height coupler make it easy to attach the Tow-Pro to most vehicles.



PUTTING YOUR WORK ABOVE EVERYTHING

When it comes to JLG® Support, it's all about you. Your productivity.

Your profitability. Your uptime. From the purchase of your first piece of equipment straight through to the training, parts and maintenance that follows.

Customer Service Contact Center

You can be assured we'll be giving an all-out effort to support you. Just think of us as your personal on-call, full-service support team. We make it happen. Period.

Financial Solutions

Maximizing your profits. Preserving your cash flow. Let our financing specialists help choose the program designed specifically for your needs.

Aftermarket Parts

Keep your equipment running at peak performance with genuine replacement parts, accessories, attachments, rebuilt and competitive parts all from one source—JLG.



Training


Knowing your equipment inside and out results in higher productivity on the job. Our instructor-led courses give you the hands-on time you need to successfully operate equipment.

Service Centers

Your needs. Your uptime. JLG is on the job to fulfill your every need, from repair, reconditioning, same-day parts and much more. We're here to support you.

Pre-Owned Equipment

As a high-value alternative to purchasing new equipment, you can search our used equipment inventory of pre-owned JLG and competitor products.

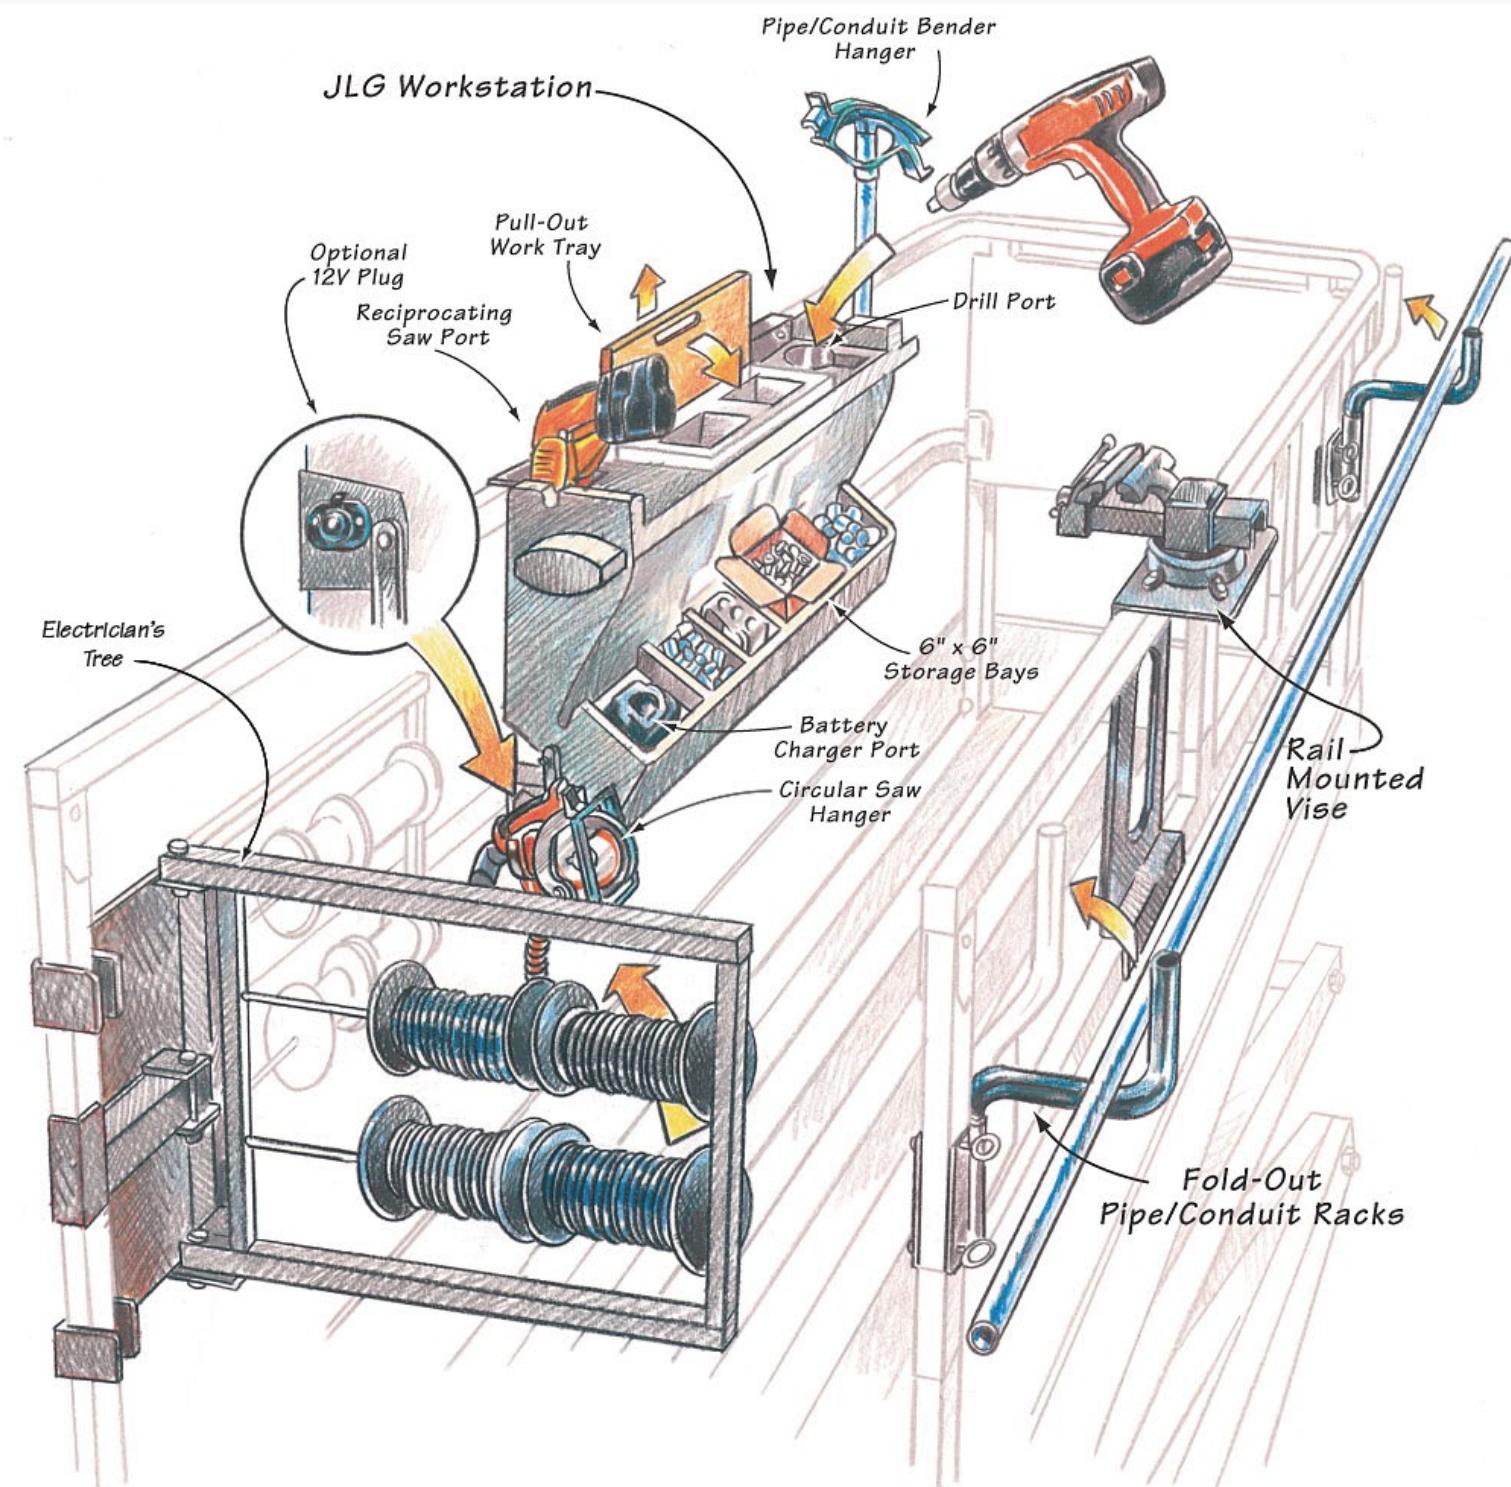

Optional Workstation in the Sky® accessory packages are designed for the specific needs of electricians, plumbers, contractors and plant maintenance professionals.

Note: Some options and accessories available exclusively through JLG® Parts, Service and Support.

ACCESSORIES THAT EXTEND YOUR SCISSOR LIFT'S VERSATILITY

Workstation in the Sky® accessory packages are designed to keep your tools and components within arm's reach. Choose from packages that feature a removable workstation that optimizes platform space with compartments for tools such as a reciprocating saw, drill, circular saw, battery charger and 6 in. x 6 in. component boxes. Plus, a pull-out tray is included to provide a flat working surface near the top of the rails.

PLUMBER'S PACKAGE

Manufacturer-approved pipe racks provide positive retention of materials for plumbing contractors, while storage outside the platform helps prevent rail damage and optimizes space.

| ES SERIES ACCESSORIES | | | | |
|--------------------------|---------|---------|--------|--------|
| | 1930ES* | 2032ES* | 2632ES | 2646ES |
| Electrician's Package | N/A | N/A | N/A | . |
| Plumber's Package | N/A | N/A | N/A | . |
| Plant Package | N/A | N/A | N/A | . |
| Workstation w/o 12V Plug | . | . | . | . |
| Workstation w/12V Plug | . | . | . | . |
| Panel Carrier | N/A | . | . | . |
| Quik Welder® by Miller® | . | . | . | . |
| Pipe Racks | N/A | . | . | . |
| Vise | N/A | N/A | N/A | . |
| Electrician's Tree | . | . | . | . |

*Non-current models



ELECTRICIAN'S PACKAGE


For electrical contractor applications that require battery-powered tools, the JLG® workstation keeps your tools within reach and off the floor of the platform. A stowable workbench and molded pockets provide ample storage while leaving the workspace open to get the job done. Electrician's Tree carries six 500 ft wire spools to speed up wire pulling and reduce friction associated with ground-based wire trees.



PLANT MAINTENANCE PACKAGE

The Plant Maintenance Package combines popular elements of the Electrician and Plumber packages to help plant maintenance professionals perform tasks, ranging from general repair to electrical and mechanical installation. In addition, a small welder powered by the machine batteries is included for light repairs.

Note: Some options and accessories available exclusively through JLG® Parts, Service and Support.

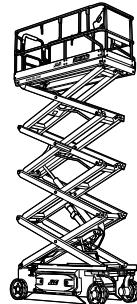

ES Series Electric Scissor Lifts

| Platform Height | 25 ft 6 in. (7.77 m) | 26 ft (7.92 m) | 31 ft 9 in. (9.68 m) |
|---|--------------------------------------|--|--|
| Platform Capacity | 800/500 lb (363/227 kg) ¹ | 1,000/500 lb (454/227 kg) ² | 1,000/700 lb (454/318 kg) ³ |
| No. Occupants (indoor/outdoor) | 2/0 | 2/2 | 2/1 |
| Platform Size | 30x90.5 in. (0.76x2.3 m) | 44x98.5 in. (1.12x2.5 m) | 44x98.5 in. (1.12x2.5 m) |
| Overall Width | 32 in. (81 cm) | 46 in. (1.17 m) | 46 in. (1.17 m) |
| Weight | 4,635 lb (2,103 kg) | 4,975 lb (2,257 kg) | 4,975 lb (2,257 kg) |
| Tilt Rating—Side to Side (indoor/outdoor) | 1.5°/NA | 1.5°/2° | 2°/2° |
| Tilt Rating—Fore and Aft | 3° | 3° | 3° |
| Power Source | 4 x 6V 220 amp-hr | 4 x 6V 220 amp-hr | 4 x 6V 220 amp-hr |

Available Options

1,000 Watt—AC Inverter/Charger

Flashing Amber Beacon

Spring-Loaded Gate

245 Amp-Hour Batteries

AGM Batteries

Lifting Lugs

UL® EE Rating

Platform Padding


Platform Padding with Proximity Switches

SkySense™

1. 2632ES - 800 lb restricted to 20 ft (indoor); 500 lb unrestricted (indoor)

2. 2646ES - 1,000 lb unrestricted (indoor); 500 lb unrestricted (outdoor)

3. 3246ES - 1,000 lb restricted to 26 ft (indoor); 700 lb unrestricted (indoor/outdoor)

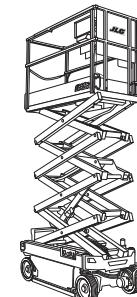

R Series Electric Scissor Lift

| Platform Height (indoor/outdoor) | 19 ft/NA (5.8 m/NA) | 19 ft/19 ft (5.8 m/5.8 m) | 25 ft 6 in./19 ft (7.8 m/5.8 m) | 32 ft/32 ft (9.8 m/9.8 m) | 39 ft 3 in./29 ft (12 m/8.8 m) |
|------------------------------------|----------------------------|-------------------------------|---------------------------------|-------------------------------|--------------------------------|
| Platform Capacity (indoor/outdoor) | 507 lb/NA (230 kg/NA) | 507 lb/507 lb (230 kg/230 kg) | 507 lb/275 lb (230 kg/125 kg) | 705 lb/507 lb (320 kg/230 kg) | 770 lb/550 lb (350 kg/250 kg) |
| No. Occupants (indoor/outdoor) | 1/0 | 2/1 | 2/1 | 2/1 | 3/1 |
| Platform Size | 62.7x25.4 in. (1.59x6.4 m) | 62.7x25.4 in. (1.59x6.4 m) | 84x41.6 in. (2.13x1.06 m) | 84x41.6 in. (2.13x1.06 m) | 96x41 in. (2.43x1.05 m) |
| Overall Width | 32 in. (81 cm) | 32 in. (81 cm) | 32 in. (81 cm) | 46 in. (1.17 m) | 46 in. (1.17 m) |

Main Features

■ Up to 770 lb (350 kg) capacity for more tools and materials to get the job done

■ Easy-to-use controls and 25 percent gradability allow operators to work confidently on a variety of job sites

■ Simple and reliable pothole protection system reduces calls and improves uptime

Available Options

900W Inverter

AGM Batteries

Anti-Vandalism Package

Coiled Platform Control Box Cable

Eagle Performance Charger

Flashing Amber Beacon

Spring-loaded Gate

White Noise Alarm

| R1932i | R1932 | R2632 | R3246 | R4045 |
|--|-------------------------------|---------------------------------|-------------------------------|--------------------------------|
| Platform Height (19 ft/NA (5.8 m/NA)) | 19 ft/19 ft (5.8 m/5.8 m) | 25 ft 6 in./19 ft (7.8 m/5.8 m) | 32 ft/32 ft (9.8 m/9.8 m) | 39 ft 3 in./29 ft (12 m/8.8 m) |
| Platform Capacity (507 lb/NA (230 kg/NA)) | 507 lb/507 lb (230 kg/230 kg) | 507 lb/275 lb (230 kg/125 kg) | 705 lb/507 lb (320 kg/230 kg) | 770 lb/550 lb (350 kg/250 kg) |
| No. Occupants (1/0) | 2/1 | 2/1 | 2/1 | 3/1 |
| Platform Size (62.7x25.4 in. (1.59x6.4 m)) | 62.7x25.4 in. (1.59x6.4 m) | 84x41.6 in. (2.13x1.06 m) | 84x41.6 in. (2.13x1.06 m) | 96x41 in. (2.43x1.05 m) |
| Overall Width (32 in. (81 cm)) | 32 in. (81 cm) | 32 in. (81 cm) | 32 in. (81 cm) | 46 in. (1.17 m) |
| Weight (2,675 lb (1,213 kg)) | 3,353 lb (1,521 kg) | 4,310 lb (1,955 kg) | 5,410 lb (2,454 kg) | 7,000 lb (3,175 kg) |
| Tilt Rating—Side to Side (2.75°/NA) | 1.75°/1.5° | 1.5°/1.5° | 2.5°/1.5° | 1.5°/1.5° |
| Tilt Rating—Fore and Aft (2.75°) | 3.75° | 3.5° | 3.5° | 3.5° |
| Power Source (4 x 6V 220 amp-hr) | 4 x 6V 220 amp-hr | 4 x 6V 220 amp-hr | 4 x 6V 220 amp-hr | 4 x 12V 150 amp-hr |

Main Features

■ Up to 770 lb (350 kg) capacity for more tools and materials to get the job done

■ Easy-to-use controls and 25 percent gradability allow operators to work confidently on a variety of job sites

■ Simple and reliable pothole protection system reduces calls and improves uptime

Available Options

900W Inverter

AGM Batteries

Anti-Vandalism Package


Coiled Platform Control Box Cable

Eagle Performance Charger

Flashing Amber Beacon

Spring-loaded Gate

White Noise Alarm

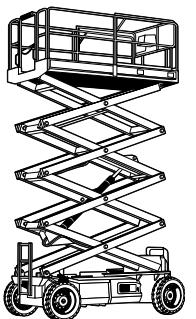

Main Features

- Double the duty cycles of competitive electric scissor lifts.
- Superior off-slab performance—full-time automatic traction control system, standard oscillating axle and all-terrain tires.
- Powerful options—QuikCharge GenSet and all-wheel drive.
- Fold-down handrails.



Main Features

- 35 ft (10.4 m) and 50 ft (15.2 m) models.
- Hydraulic auto-leveling outriggers for faster and easier set-up.
- 24V DC electric or gasoline powered engine.
- Platform controls with one-hand operation of boom functions.
- Accessory Mounting Tray accommodates customer-provided generator, air compressor or pressure washer.
- Standard air and water lines to the platform.
- Optional Drive and Set from the platform.


| | 4069LE | M4069LE |
|---|------------------------------|------------------------------|
| LE Series Large Electric Scissor Lifts | | |
| Platform Height | 40 ft (12.19 m) | 40 ft (12.19 m) |
| Platform Capacity | 800 lb (363 kg) | 800 lb (363 kg) |
| No. Occupants (indoor/outdoor) | 2/2 | 2/2 |
| Platform Size | 65 x 115 in. (1.65 x 2.92 m) | 65 x 115 in. (1.65 x 2.92 m) |
| Overall Width | 5 ft 9 in. (1.75 m) | 5 ft 9 in. (1.75 m) |
| Weight | 10,560 lb (4,790 kg) | 10,860 lb (4,926 kg) |
| Tilt Rating—Side to Side | 3° | 3° |
| Tilt Rating—Fore and Aft | 5° | 5° |
| Power Source | 8 x 6V 370 amp-hr | 8 x 6V 370 amp-hr |
| Generator Set—M models | | 45 amp Diesel Kubota |
| Available Options | | |
| 110V-AC Power Pack Inverter | . | |
| Flashing Amber Beacon | . | . |
| Hydraulic Leveling Jacks | . | . |
| Self-Closing Entry Gate | . | . |
| Foam-Filled Sand/Turf Tires | . | . |
| Top Rail Padding | . | . |
| Rail and Deck Padding | . | . |
| Bio-Degradable Hydraulic Oil | . | . |
| T350 | | |
| Towable Boom Lifts | | |
| Platform Height | 34 ft 5 in. (10.5 m) | 50 ft 9.5 in. (15.3 m) |
| Platform Capacity | 500 lb (227 kg) | 500 lb (227 kg) |
| Horizontal Outreach | 20 ft 2 in. (6.14 m) | 29 ft 5 in. (9.0 m) |
| Overall Width | 4 ft 11.25 in. (1.5 m) | 5 ft 7 in. (1.7 m) |
| Weight | 3,400 lb (1,542 kg)* | 4,800 lb (2,177 kg)* |
| Power Source—Electric | 24V DC, 4 x 6V 220 amp-hr | 24V DC, 4 x 6V 220 amp-hr |
| Gasoline Engine—Optional | Honda GX 270 | Honda GX 270 |
| *Machine Weights may increase with options. | | |
| Available Options | | |
| Platform Rotator | . | . |
| Material Hook—500 lb capacity | . | . |
| Platform Mounted Glass/Panel Tray | . | . |
| Spare Tire—Full Size | . | . |
| Flashing Amber Beacon | . | . |
| Lifting Lugs | . | . |
| 2,500 Watt Generator | . | . |



| | E300AJP |
|--|-----------------------------|
| E300 Series Electric Boom Lifts | |
| Platform Height | 29 ft 5 in. (8.96 m) |
| Platform Capacity | 500 lb (227 kg) |
| Horizontal Outreach | 20 ft 1 in. (6.14 m) |
| Up and Over Height | 13 ft 2 in. (4.01 m) |
| Overall Width | 48 in. (1.22 m) |
| Weight | 15,705 lb (7,123 kg) |
| Power Source | 48V DC 8 x 6V 305 amp-hr |
| Available Options | |
| Platform Worklights | . |
| 1/2 in. Air Line to Platform | . |
| 1000 Watt Inverter | . |
| UL EE Rating | . |
| 375 amp-hr Batteries | . |

Main Features


- 4 ft (1.22 m) articulating jib with optional JibPLUS™.
- ATC (Automatic Traction Control) improves performance on uneven surfaces.
- Ultra compact width of only 48 in. (1.22 m).
- Fast cycle times.



| | H340AJ | H800AJ |
|--|---------------------------------|--|
| H340AJ & H800AJ Articulating Boom Lifts | | |
| Platform Height | 33 ft 10 in. (10.33 m) | 80 ft (24.38 m) |
| Platform Capacity | 500 lb (227 kg) | 500 lb (227 kg) |
| Horizontal Outreach | 19 ft 11 in. (6.06 m) | 51 ft 10 in. (15.8 m) |
| Up and Over Height | 17 ft (5.17 m) | 32 ft 1 in. (9.78 m) |
| Overall Width | 6 ft 4 in. (1.93 m) | 8 ft (2.44 m) |
| Weight | 9,860 lb (4,472 kg) | 35,400 lb (16,057 kg) |
| Power Source—Electric | 8 x 12V 100 amp-hr | 8 x 12V 100 amp-hr |
| Diesel Engine | Kubota Z482 11.1 hp (8.3 kW) | Kubota Tier 4 Final 30 hp (22.3 kW) |
| Available Options | | |
| 30 x 48 in. (0.76 x 1.22 m) Platform | . | . |
| 1/2 in. Air Line to Platform | . | . |
| 9 x 20 Non-Marking Foam-Filled Tires | . | . |
| 7 x 18 Solid Tires | . | . |
| 7 x 18 Non-Marking Foam-Filled Tires | . | . |
| AC Generator | . | . |
| Light Package | . | . |
| Hostile Environment Kit | . | . |
| Flashing Amber Beacon | . | . |
| Special Hydraulic Oils | . | . |
| Self Closing Gate | . | . |
| SkySense™ | . | . |

Main Features

- Tier 4 Final, diesel-powered generator produces fewer emissions.
- 8 x 12v 100 amp-hour AGM batteries deliver longer runtime.
- Four direct electric drive motors provide optimal off-slab productivity with enough power for 45% gradeability.
- Four-wheel drive for exceptional terrainability.

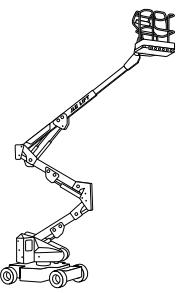


Main Features

- JibPLUS® models provide access in and around confined work areas.
- ATC (Automatic Traction Control) improves performance on uneven surfaces.
- QuikCharge GenSet option provides automatic charging for continuous machine operation.

E400 Series Electric Boom Lifts

| | E400AJP |
|--------------------------------------|-----------------------------|
| Platform Height | 40 ft (12.19 m) |
| Platform Capacity | 500 lb (227 kg) |
| Horizontal Outreach | 22 ft 5 in. (6.83 m) |
| Up and Over Height | 21 ft 6 in. (6.55 m) |
| Overall Width | 5 ft 9 in. (1.75 m) |
| Weight—M Models, add 300 lb (136 kg) | 13,700 lb (6,214 kg) |
| Power Source | 48V DC 8 x 6V 370 amp-hr |
| Generator Set—M models | 45 amp Kubota |
| Available Options | . |
| Padding for Platform | . |
| Light Package | . |
| UL® EE Rating | . |
| 1200 Watt Inverter | . |

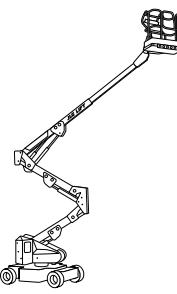

Main Features

- The fastest boom speeds in this class.
- ATC (Automatic Traction Control) improves performance on uneven surfaces.
- QuikCharge GenSet option provides automatic charging for continuous machine operation.
- Jib models provide access in and around confined work areas.

E450 Series Articulating Boom Lifts

| | E450AJ |
|--------------------------|-----------------------------|
| Platform Height | 45 ft (13.72 m) |
| Platform Capacity | 500 lb (227 kg) |
| Horizontal Outreach | 23 ft 9 in. (7.24 m) |
| Up and Over Height | 25 ft 3 in. (7.7 m) |
| Overall Width | 5 ft 9 in. (1.75 m) |
| Weight | 14,400 lb (6,532 kg) |
| Power Source | 48V DC 8 x 6V 370 amp-hr |
| Generator Set—H models | 45 amp Kubota |
| Available Options | . |
| Padding for Platform | . |
| Solid Non-Marking Tires | . |
| UL® EE Rating | . |
| 1200 Watt Inverter | . |
| SkySense™ | . |

EC/H600 Electric Boom Lifts

| | EC600SJ | H600SJ | EC600SJP | H600SJP |
|------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| Platform Height | 60 ft 3 in. (18.36 m) | 60 ft 3 in. (18.36 m) | 60 ft 4 in. (18.39 m) | 60 ft 4 in. (18.39 m) |
| Platform Capacity | 500 lb (227 kg) |
| Horizontal Outreach | 43 ft 3 in. (13.18 m) | 43 ft 3 in. (13.18 m) | 44 ft 5 in. (13.54 m) | 44 ft 5 in. (13.54 m) |
| Overall Width | 7 ft 11 in. (2.41 m) |
| Weight | 16,710 lb (7,580 kg) | 16,710 lb (7,580 kg) | 17,210 lb (7,807 kg) | 17,210 lb (7,807 kg) |
| Power Source | 48V DC, 8 x 6V 415 amp-hr |
| Generator Set—M models | 45 amp Diesel Kubota |


Available Options

| | | | | |
|--------------------------------------|---|---|---|---|
| 30 x 48 in. (0.76 x 1.22 m) Platform | . | . | . | . |
| 1/2 in. Air Line to Platform | . | . | . | . |
| Foam-Filled Tires | . | . | . | . |
| 1200 Watt Inverter | . | . | . | . |
| Hostile Environment Kit ¹ | . | . | . | . |
| UL® EE Rating | . | . | . | . |
| Tow Package ² | . | . | . | . |
| Light Package ³ | . | . | . | . |
| Flashing Amber Beacon | . | . | . | . |
| SkySense™ | . | . | . | . |

1. Includes console cover, boom wipers and cylinder bellows.


2. 2WD only.

3. Includes head and tail lights, as well as platform work lights and beacon.

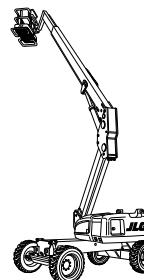

Main Features

- The world's first 60-foot electric boom—Indoor and outdoor versatility.
- Indoor advantages—Zero emissions, industry-leading noise reduction, non-marking tires and the lowest weight in its class.
- Outdoor advantages—Rugged design with all-wheel drive, automatic traction control and oscillating axle.
- Available with 45 amp Kubota diesel-powered generator to maintain battery charge level during extended outdoor use.

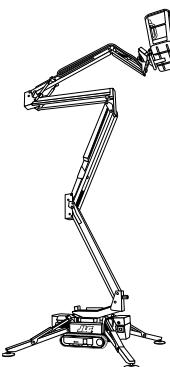

| | X430AJ | X500AJ | X600AJ | X770AJ | X1000AJ |
|--|----------------------------------|----------------------------------|----------------------------------|----------------------------------|--------------------------|
| Compact Crawler Series Boom Lifts | | | | | |
| Platform Height | 43 ft 6 in. (13.30 m) | 49 ft (14.95 m) | 59 ft 3 in. (18.05 m) | 77 ft 5 in. (23.60 m) | 100 ft (30.48 m) |
| Platform Capacity | 500 lb (227 kg) | 500 lb (227 kg) |
| Horizontal Reach | 21 ft 7 in. (6.60 m) | 23 ft (7.0 m) | 30 ft (9.1 m) | 43 ft (13.1 m) | 54 ft 2 in. (16.50 m) |
| Overall Width | 29 in. (0.75 m) | 31 in. (0.78 m) | 31 in. (0.78 m) | 39 in. (0.99 m) | 47 in. (1.19 m) |
| Weight | 4,392 lb (1,992 kg) | 5,071 lb (2,300 kg) | 6,571 lb (2,980 kg) | 9,665 lb (4,384 kg) | 16,790 lb (7,616 kg) |
| Power Source | | | | | |
| Gasoline Engine | Honda iGX390 11.7 hp (8.7 kw) | Honda iGX390 11.7 hp (8.7 kw) | Honda iGX390 11.7 hp (8.7 kw) | | |
| Diesel Engine | | | Kubota D902 21.6 hp (16.1 kW) | Kubota D902 21.6 hp (16.1 kW) | |
| Electric Engine (Optional) | 100Ah 36V Lithium-Ion | 100Ah 48V Lithium-Ion | 100Ah 72V Lithium-Ion | 100Ah 83V Lithium-Ion | 150Ah 76V Lithium-Ion |

Main Features

- Low weight and rubber tracks for enhanced maneuverability and accessibility.
- Compact design increases ease of transport.
- Electric and combustion combination power for efficient energy usage.

20E 26E 32E




| | | | |
|--------------------------------|---------------------|----------------------|-----------------------|
| Platform Height | 20 ft 3 in. (6.2 m) | 26 ft 6 in. (8.10 m) | 32 ft 3 in. (9.83 m) |
| Platform Capacity—Unrestricted | 500 lb (227 kg) | 500 lb (227 kg) | 500 lb (227 kg) |
| Horizontal Reach | 6 ft 5 in. (1.97 m) | 8 ft 8 in. (2.64 m) | 14 ft 11 in. (4.55 m) |
| Overall Width | 3 ft 3 in. (0.99 m) | 3 ft 9 in. (1.14 m) | 3 ft 9 in. (1.14 m) |
| Weight | 4,875 lb (2,210 kg) | 6,900 lb (3,130 kg) | 10,140 lb (4,600 kg) |
| Power Source | 24V 225 amp-hr | 24V 260 amp-hr | 48V 260 amp-hr |

Available Options

- | | | | |
|------------------------------|---|---|---|
| 1/2 in. Air Line to Platform | . | . | . |
| Light Package | . | . | . |

Main Features

- Versatile articulating jib provides up to 14 ft 6 in. (4.42 m) up and over reach.
- 345° rotating mast for unmatched positioning capabilities.
- Capacity for two workers and supplies.
- Drive through doorways and narrow aisles.
- Navigate around multiple obstacles on the ground and in the air.

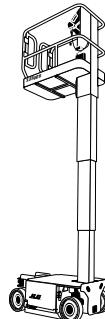

| | 1230ES |
|-----------------------------------|-----------------------------------|
| 1230ES Electric Mast Lifts | |
| Platform Height | 12 ft (3.66 m) |
| Platform Capacity | 500 lb (227 kg) |
| Platform Size | 39.7 x 27.2 in. (1.00 m x 0.68 m) |
| Overall Width | 30 in. (76 cm) |
| Weight | 1,765 lb (801 kg) |
| Power Source | 4 x 6V 220 amp-hr |

Main Features

- Maintenance-free elevating mast design—No chains, cables or rollers to grease or adjust.
- Only four hydraulic hoses—Less to maintain, minimizes leak potential.
- Compact dimensions and low GVW—Fits on most elevators.

JLG Industries, Inc.

1JLG Drive

McConnellsburg, PA 17233-9533

Telephone 717-485-5161

Toll-free in US 877-JLG-LIFT

Fax 717-485-6417

www.jlg.com

An Oshkosh Corporation Company

Part No.: 3131694
R0120_A92.20
Printed in USA

