

RT2669

ENGINE POWERED ROUGH TERRAIN SERIES

SCISSOR LIFT



STANDARD SPECIFICATIONS

Performance

Working Height	10 m
Platform Height – Elevated	8 m
Platform Capacity - indoor	🧑🧑🧑 680 kg
Platform Capacity - outdoor	🧑🧑🧑 680 kg
Capacity on Deck Extension	136 kg
Lift/Lower Time (no load)	36/28 seconds
Maximum Drive Height	Full Height
Machine weight *	3,677 kg
Maximum Ground Bearing Pressure - wheels	2.75 kg/cm ²
Drive Speed - Stowed	5.6 km/h
Drive Speed - Elevated	0.8 km/h
Gradeability	40%
Turning Radius - Inside	2.1 m
Turning Radius – curb to curb	4.73 m
Max Tilt Rating (side-to-side)	2.5 degrees
Max Tilt Rating (fore & aft)	3 degrees

* Certain options or country standards may increase weight and/or dimensions.

KEY SPECS

Platform Height – Elevated
8 m

Machine Width
1.76 m

Platform Capacity
680 kg indoor 🧑🧑🧑
680 kg outdoor 🧑🧑🧑

Drive Speed – Stowed
5.6 km/h

KEY FEATURES

- Our engine powered rough terrain models offer drive capability at full height, limiting unnecessary trips up and down for working professionals.
- Delivers the latest technology, featuring an LCD platform control box with LiftSense technology and USB charging for next-level, real-time productivity and service communication to the operator.
- This machine utilizes higher part commonality for simplified service across the rough terrain family.
- An optional QuikLevel Advanced system allows the machine to level on a side slope, helping operators position and drive while elevated closer to the job.

Power

Diesel Engine	KUBOTA, T4F 1.26L, 24.8HP
Drive System	2WD Hydrostatic

Tires

Foam Filled	26 x 12
-------------	---------

Hydraulic System

Hydraulic Reservoir	50 L
---------------------	------

STANDARD FEATURES

- 1.06 m Roll-out Deck Extension
- Self-Closing Gate
- Removable platform console box
- Lanyard attach points
- Full proportional drive joystick control with integral thumb steer switch
- Proportional Lift and Drive
- Joystick enable for lift and drive
- Platform Load sensing system
- Two speed drive selection
- Two Wheel Hydrostatic Drive
- Full Time Traction Control
- Programmable "Personality" settings
- On-board self-diagnostic testing
- Sculptured steel hoods
- Tilt alarm and indicator light
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- 26 x 12 Foam Filled Lug Tread Tires - Non marking
- Oscillating front axle
- Tie Down Lugs
- Lubrication-Free Scissor Arm Bushings
- Scissor Maintenance Prop
- AC cable to platform
- Ground control selector switch with key lock
- Hour meter
- Horn
- All motion alarm
- Descent alarm
- Manual Descent Pull Cable
- Flashing Amber Beacon
- Clearsky SMART FLEET connectivity module - Subscription through On Line Express
- Plated Fasteners
- Nickel Plated Pins, Yellow Zinc-Chromate
- Telematics-Ready Harness
- LCD Display with LiftSense System

ACCESSORIES & OPTIONS

- 4 Wheel drive
- QuikLevel Advanced
- Heavy Duty Pipe Racks
- Special Paint
- White Noise backup Alarm
- Hydraulic Oil Cooler
- Hydraulic levelling jacks
- Platform Worklights
- Plugs and Sockets
- SkySense level 2
- 2.5 kW /220V/ 50Hz Belt-driven Generator - Provides power to platform
- Cold weather package
- Panel carrier
- Pipe racks
- Synthetic Biodegradable Hydraulic Oil

RT2669


SCISSOR LIFT

ENGINE POWERED ROUGH TERRAIN SERIES



DIMENSIONS

All dimensions are approximate

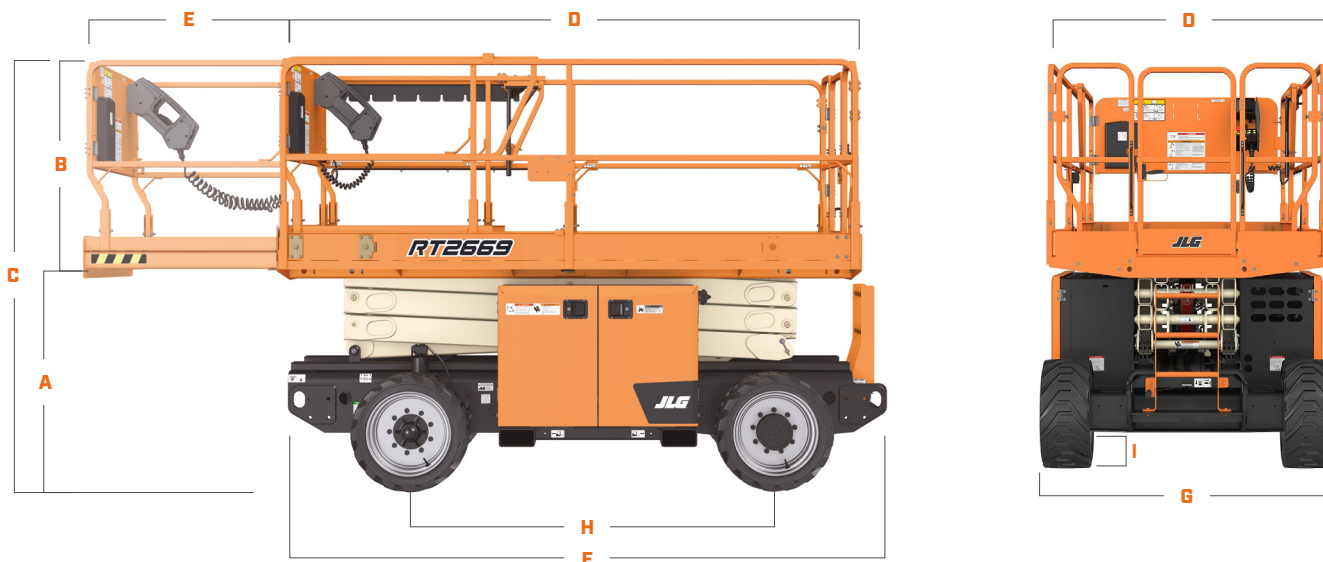

A.	Platform Height – Lowered	1.3 m
B.	Platform Railing Height	1.14 m
C.	Stowed Height	2.46 m
D.	Platform Size Inside (W x L)	3.3 x 1.6 m
E.	Deck Extension	1.07 m
F.	Overall Length	3.53 m
G.	Overall Width	1.76 m
H.	Wheelbase	2.07 m
I.	Ground Clearance (centre of machine)	25.6 cm

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.



JLG EMEA BV
Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands
Tel.: +31 (0)23 565 5665
www.jlg.com

An Oshkosh Corporation Company