

SKYSENSE® FOR BOOMS ACCESSORIES



HEIGHTEN YOUR AWARENESS

SkySense is an enhanced detection system from JLG that uses strategically placed object detection sensors to provide operators an added level of awareness of their immediate surroundings as they elevate and/or drive. When a machine is in use, the sensors establish warning zones and stop distances in the machine's direction of motion, increasing protection of people and property. The warning zones scale for functions with proportional joystick input, which is unique to JLG and SkySense.

FEATURES AND BENEFITS


- Produces audible and visual warnings of obstructions
- Slows and then stops machine functions based on proximity to obstructions
- Minimizes onsite incidents and damage to machine and job site structures
- Upfits easily to existing machines in your fleet
- Offers two levels of coverage for a customized solution to your needs



LEVEL I: 8 SENSORS



LEVEL II: 12 SENSORS

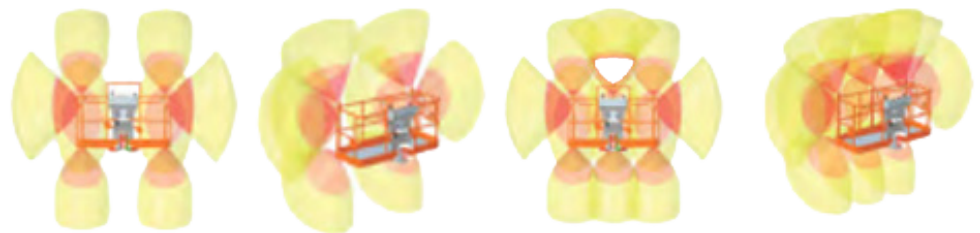

(coverage areas are approximations, for reference only)

SKYSENSE CANNOT BE USED IN CONJUNCTION WITH:

- SOFT TOUCH
- TOP RAIL EXTENSION
- FALL ARREST PLATFORM
- BOLT ON FALL ARREST
- PLATFORM MESH
- SKYGLAZIER
- CABLE LADDER

WARNING:

SkySense is not intended to replace or reduce the need for the operator to be aware of the environment around the machine. Hazards that will cause serious injury or death may not be prevented or reduced by SkySense. The operator must always look in the direction of travel, avoid power lines, avoid obstacles that could strike the machine or persons in the platform, and follow all instructions, decals, and other warnings provided with this machine. The operator must not rely on SkySense as a substitute for following the instructions and warnings contained in the manuals and placards provided with this machine.



SKYSENSE® FOR BOOMS

ENHANCED DETECTION SYSTEM



SYSTEM AND COMPONENTS

ULTRASONIC SENSORS

- Conical sensing area
- Does not provide a 100% envelope around the operator
- Oriented to provide optimal coverage behind the operator (Boom Level I)
- Operation function (drive, lift) determines which sensors are evaluating for objects

NOTIFICATION FEATURES

- Audible
 - Left/Right independent alarm
 - Switch will turn speaker on/off
- Visual
 - Left/Right independent light(s)

SENSOR WARNING ZONES

- Warning and Stop zone distances differ based on machine function
- Stop zones for a given function are fixed
- Warning zones scale for functions with proportional joystick input

TO CLEAN SENSORS

- Gently and cautiously wipe the sensor face using water
- Acetone may be used if necessary
- Excessive force may damage sensor face
- To order sensors separately, use part numbers 1001241162 & 1001237902

KIT PART NUMBERS:

BOOMS	SERIAL NUMBER RANGE	LEVEL I: 8 SENSORS PART NUMBER	LEVEL II: 12 SENSORS PART NUMBER
COMBUSTION POWERED BOOM LIFT ¹	PRIOR TO PVC2001 (ALL MODELS EQUIPPED WITH ADE (ADVANCED DESIGN ELECTRONICS))	1001289905	1001289906
	PVC2001 TO PRESENT (ALL)		
E300AJ	0300211844 TO PRESENT		
E300AJP			
E400AN			
E400AJP	0300208530 TO PRESENT		
E400AJPN			
M400AJP			
M400AJPN			
E450A	0300208529 TO PRESENT, B300001429 TO PRESENT		
E450AJ			
M450A			
M450AJ			
E600	0300218866 TO 0300218868 0300219271 TO PRESENT		
E600J			
E600JP			
M600			
M600J			
M600JP			
EC600SJ	ALL		
EC600SJP			
H340AJ	ALL		

¹Excluded models: E300A, E400A, M400A, H800AJ, 670SJ SL

Order Today

Online: onlineexpress.jlg.com
 Call: 1-877-554-5438 | Fax: 1-800-733-8939



JLG INDUSTRIES, INC.
 Toll-free US 877-JLG-LIFT
JLG.com

An Oshkosh Corporation Business